

AR-SB Series LED Area Lighting



SPECIFICATION FEATURES & BENEFITS



- ▶ Over 120lm/w - high efficiency retrofit for 60W - 400W HID Shoebox type flood lighting fixtures in all commercial and industrial applications.
- ▶ Rugged die cast aluminum, IP65 all weather enclosure with multiple mounting options for installation in any environment and application.
- ▶ Economical price for large scale commercial and industrial projects.
- ▶ Cree COB for efficient and reliable lifetime operation.



TECHNICAL SPECIFICATIONS

AR - SB - G1 -	125
Wattage:	125W
Lumens:	15,500lms.
CCT:	5000K
Standard Voltage:	100-277VAC 50/60Hz
Operation Conditions:	-40°C - +40°C
L70 Lifespan:	>50,000hrs.
Ingress Protection:	IP65
Dimensions (W/L/H):	16.in / 20.7in / 5in
Luminaire Weight:	7lbs

Notes: Luminous flux ±5% / CCT ±283K @ Ta=25C / CRI ±5% All data are nominal values.

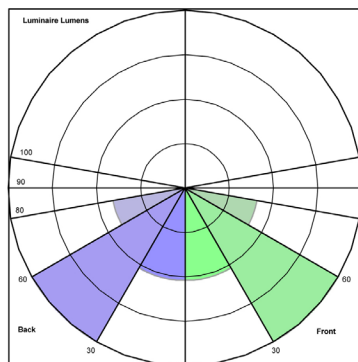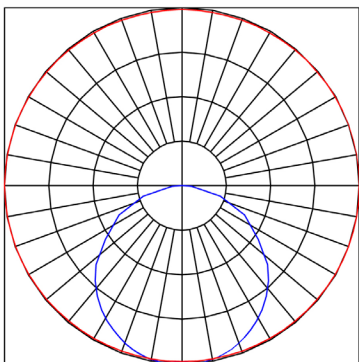

PART NUMBER SPECIFICATION

Series	Model - Power	Voltage	Mounting Option
AR-SB-G1	-	- 100277	-
	125 (125W)	100277 (100 - 277VAC)	Y (Yoke - Standard) T (Trunion Brackets) FPM (Fixed Pole Tenon) APM (Adjustable Pole Tenon)