




FASTFIT™

T8 A3 Series

Ballast Compatible LED Tubes

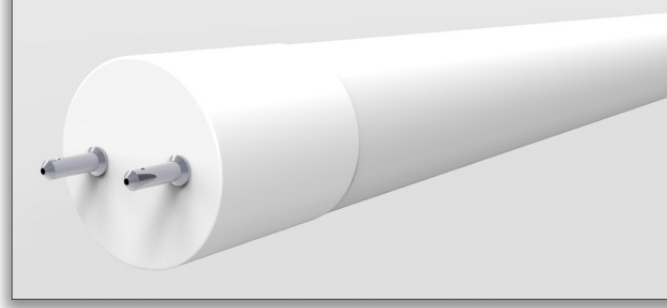

SPECIFICATION DATA

Model:	T82 - A3A - 12	T84 - A3A - 12	T84 - A3A - 14	T84 - A3A - 16
Wattage per Ballast Factor - Low - 0.78 / Normal - 0.88 / High - 1.1	12.8 / 14.5 / 18.6	12.8 / 14.3 / 18.6	15.2 / 16.1 / 23.2	16.5 / 17.1 / 25.8
Lumens per Ballast Factor:	1300 / 1544 / 2150	1350 / 1845 / 2200	1650 / 2098 / 2750	1950 / 2239 / 2820
Lm/W:	125.5	132.51	133.33	130.77
Wattage @ 5000K:	12.81	13.35	14.44	16.15
Rated Lumens @ 5000K:	1608	1769	1920	2112
CRI:	81.6	80.7	80.8	80.7
THD @ 120VAC:	6.49	7.6	9.1	12.3
DUV:	0.0044	0.0055	0.0054	0.0052
Ballast Compatibility:	Manufacturer Approved Electronic Rapid Start / Instant Start / Programmed Start / Dimming / Emergency			
Lamp Base:	G13 Bi-pin			
CCT Options:	3000K / 3500K / 4000K / 5000K			
L70 Lifespan:	>64,000hrs.			
Beam Angle / Field Angle	160° / 240°			
Length / Diameter:	23.62in - 600mm / 1.02in - 26mm	47.24in - 1200mm / 1.02in - 26mm		
Weight:	6.5oz. / 185g	13oz. / 370g		
Operation Temperature:	-10°C to +40°C Ambient			
Limited Warranty:	Standard 5-Year Limited Manufacturer's Warranty / Optional 10-Year Limited Warranty			

Notes: Tested Values@ Ta=25°C / All values are nominal.

PART NUMBER SPECIFICATION			Part Number Example: FF-T84-A3A-12-30
FF -	-	-	-
Series	Length / Series	Nominal Wattage	CCT Option
FASTFIT	T82 - A3A (2ft)	12 (12 Watts)	30 (3000K) 35 (3500K) 40 (4000K) 50 (5000K)
	T84 - A3A (4ft)	12 (12 Watts) 14 (14 Watts) 16 (16 Watts)	

PROJECT SPECIFICATION		
Project:	Part Numbers:	Quantity:
Approved:		
Date:		