




RM Retrofit Module B5 Series

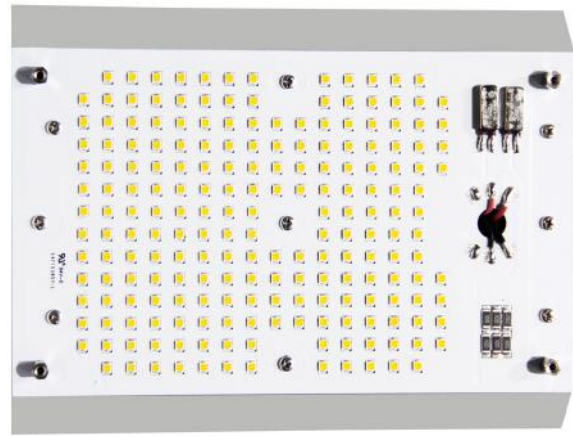

SPECIFICATION DATA

	30	45	60	75	100	120	150	200	280	320	350	
Wattage @120VAC	29.27	44.24	52.75	68.88	99.86	123.1	151.4	199.3	278.5	305.3	348.6	
Lumens @ 5000K:	4557	6784	8162	10,631	14,337	17,636	21,691	28,913	39,044	43,807.5	48,825	
Lm/W	155.7	153.35	155.2	154.34	143.27	143.27	143.27	145.51	140.19	143.49	140.06	
Voltage / Power Data:	90-305VAC 50/60Hz / Power Factor >.92 / THD <15%											
Compliance:	DLC 4.1 Premium / ETL / RoHS											
Color Temperature Options:	4000K / 4500K / 5000K											
Component Types:	Nichia LED / Sunon Maglev Fan / Meanwell Power Supply											
Operating Temp:	-35°C - +55°C											
Beam Angle:	120 Deg.											
Chromaticity Data:	CRI ≥73											
Limited Warranty:	Standard 5-Year Limited Manufacturer's Warranty / Optional 10-Year Limited Warranty											
Kit Components:	L - Bracket / Plate Mount included											
Dimensions (in) L x W x H:	4.72 x 4.72 x 1.97			6.1 x 5.12 x 1.97			7.87 x 5.9 x 1.97			10.63 x 10.0 x 2.91		
Weight (lbs):	.77			1.0			1.7			4.2		

Notes: All values nominal unless specified. Luminous flux ±10% / CCT values per ANSI C78.377-2011 / CRI ±5%

PART NUMBER SPECIFICATION

Part Number Example: RM-B5-30-40-90305-D

RM - B5	-	-	-	-	-
Series	Wattage	CCT	Voltage:	Dimming:	DLC Designation:
	30 (30W) 45 (45W) 60 (60W) 75 (75W) 100 (100W)	40 (4000K) 45 (4500K) 50 (5000K)	90305 (90-305VAC)	D (0-10V Dimming) Blank (Non-Dimming)	Blank (Outdoor Pole Mount) WP (60W Only - Outdoor Full Cut-off Wall Mount)
	120 (120W) 150 (150W) 200 (200W) 280 (280W) 320 (320W) 350 (350W)		90305 (90-305VAC) 347480 (347-480VAC)		

PROJECT SPECIFICATION

Project:	Part Numbers:	Quantity:
Approved:		
Date:		