

WP-FC-G Series Full Cutoff LED Wallpack



SPECIFICATION FEATURES & BENEFITS


- ▶ High efficiency retrofit for 60W - 250W HID wallpacks in all commercial and industrial applications.
- ▶ Rugged die cast aluminum, IP65 all weather enclosure for installation in any environment.
- ▶ Economical price for large scale commercial and industrial projects.
- ▶ Cree COB for efficient and reliable lifetime operation.



TECHNICAL SPECIFICATIONS

WP - FC - G1 -	36	75
Wattage:	36W	75W
Lumens:	3000lms.	6450lms.
CCT:	5000K	
Voltage:	100-277VAC 50/60Hz	
Operation Conditions:	-30°C - +40°C	
L70 Lifespan:	>50,000hrs.	
Ingress Protection:	IP65	
Dimensions (W/H):	16.5in / 7in	
Wall Projection:	9.25in	
Luminaire Weight:	9.9lbs	

Notes: Luminous flux ±5% / CCT ±283K @ Ta=25C / CRI ±5% All data are nominal values.

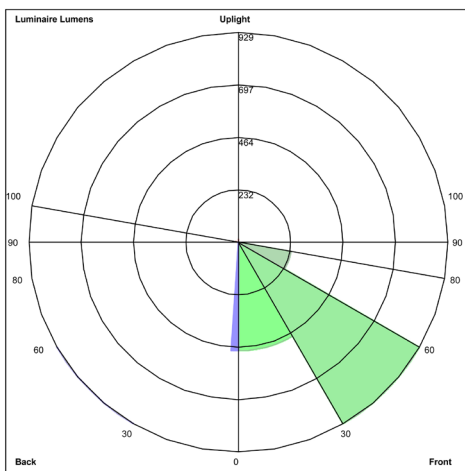

PART NUMBER SPECIFICATION

WP - FC - G1	-	- 100277
Series	Model - Power	Voltage:
	36 (36W) 75 (75W)	100277 (100 - 277VAC)