

WP-NC-G Series Non Cutoff LED Wallpack



SPECIFICATION FEATURES & BENEFITS



- ▶ High efficiency retrofit for 60W - 400W HID wallpacks in all commercial and industrial applications.
- ▶ Rugged die cast aluminum, IP65 all weather enclosure for installation in any environment.
- ▶ Economical price for large scale commercial and industrial projects.
- ▶ Cree COB for efficient and reliable lifetime operation.



TECHNICAL SPECIFICATIONS

WP - NC - G1 -	37	56	160
Wattage:	37W	56W	160W
Lumens:	3442lms.	5589lms.	15.775lms.
CCT:	5000K		
Voltage:	100-277VAC 50/60Hz		
Operation Conditions:	-30°C - +40°C		
L70 Lifespan:	>50,000hrs.		
Ingress Protection:	IP65		
Dimensions (W/H):	14.5in / 9.3in	14.5in / 9.3in	18in / 9.84in
Wall Projection:	7.55in	7.55in	13in
Luminaire Weight:	9.9lbs	10.5lbs	

Notes: Luminous flux ±5% / CCT ±283K @ Ta=25C / CRI ±5% All data are nominal values.

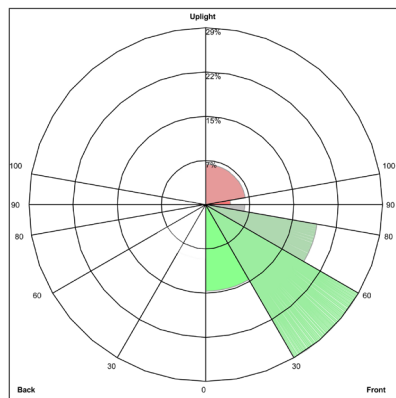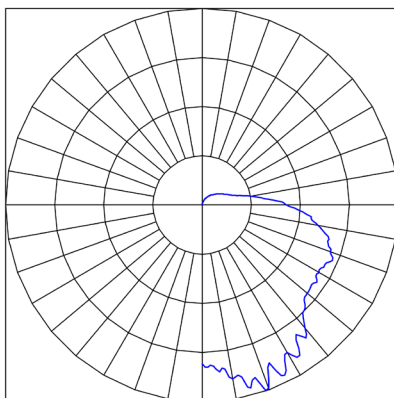

PART NUMBER SPECIFICATION

WP - NC - G1	-	- 100277
Series	Model - Power	Voltage:
	37 (37W) 56 (56W) 160 (160W)	100277 (100 - 277VAC)