


# Wireless Control - Tunable CCT Flat Panel Series

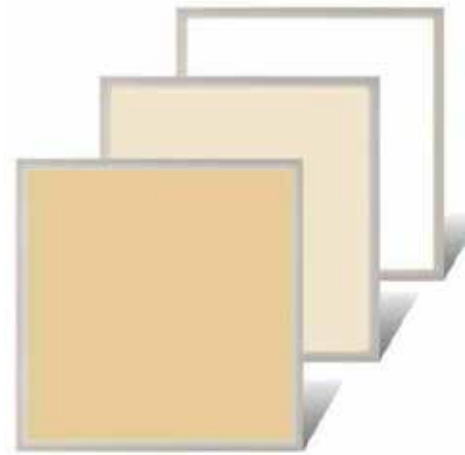

## SPECIFICATION FEATURES & BENEFITS

- ▶ High efficiency, DLC listed luminaire for new installation or ceiling retrofit in a wide range of commercial and industrial applications.
- ▶ Wireless user tunable CCT - 2700-6500K
- ▶ Wireless dimming options including Bluetooth, handheld remote and wall mount control pad.

## SPECIFICATION SUMMARY

Model:	SC-PSDAWRE (1'x4' Series)	SC-PSDAWRE (2'x2' Series)	SC-PSDAWRE (2'x4' Series)
Rated Wattage:	40	40	50
Lumens	>4040	>4000	>5050
Max. Dimensions (in):	12x48	24x24	24x48
Weight (lbs):	6.6lbs	6.6lbs	13.22lbs
Max. Height (in):		2.88	
CRI:		>80	
THD @ 120VAC:		<20	
Power Factor:		>.95	
Compliance:	UL / cUL / DLC		
CCT / Dimming Control:	Wireless Bluetooth IOS & Android APP / Handheld Remote / Wireless Wall Mount Control Pad		
Voltage:	100-277VAC		
Beam Angle:	110°		
L70 Lifespan:	50,000hrs.		
Operating Temperature:	10°C to +40°C Ambient		
Carton Qty:	2pcs	2pcs.	2pcs.
Carton Size:	50.4x9.8x14.7	26.4x26.5x9.5	50.8x26.7x8.7
Carton Weight:	33lbs	37.5lbs	61.7lbs
Limited Warranty:	5 Yrs.		

Notes: All values are nominal. Please see installation instructions for wireless protocol specifications and download instructions.

## PART NUMBER SPECIFICATION

Part Number Example: SC-PSDAWRE -3012-X40W

SC-PSDAWRE	-	-
Series	Size	Wattage
Wireless Controlled - Adjustable CCT Flat Panel Series	3012 (1x4ft)	X40W (40Watt)
	6060 (2x2ft)	X40W (40Watt)
	6012 (2x4ft)	X50W (50Watt)