

eTECHLED®

Flat Panel Series




SPECIFICATION SUMMARY

Model:	P-A4-14-30	P-A4-14-40	P-A4-22-20	P-A4-22-30	P-A4-22-40	P-A4-24-30*	P-A4-24-36	P-A4-24-40	P-A4-24-50	P-A4-24-75
Lumens:	>3600	>4800	>2500	>3900	>5200	>3900	>4680	>5240	>6250	>9000
Wattage:	30	40	20	30	40	30	36	40	50	75
Lm/W:	>120	>120	>125	>130	>130	>130	>130	>130	>125	>120
CRI:	83	82	82	81	81	81	82	82	80	81
THD @ 120VAC:	7.27	6.1	15.71	12.49	12.78	13.50	13.80	14.80	15.71	13.42
Compliance:	UL / RoHS		DLC / UL / RoHS							
Dimming Option:	0-10VDC / PWM									
Voltage:	100-277VAC									
CCT Options:	3000K / 3500K / 4000K / 5000K									
Beam / Field Angle:	110° / 165°									
Power Factor:	≥.99									
L70 Lifespan:	50,000 Hrs. (Rated) / 66,000 Hrs. L70 (ISTMT - TM-21)									
Operating Temp:	-30°C to +45°C Ambient									
Limited Warranty:	Standard 5 Year									


Notes: Values are nominal unless noted. * P-A4-24-30 is DLC Pending

DIMENSIONS


Model 1x4

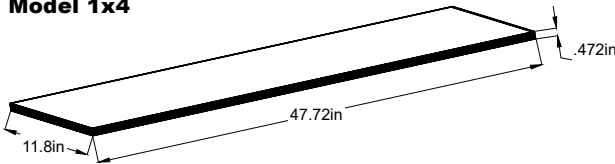

Model 2x2

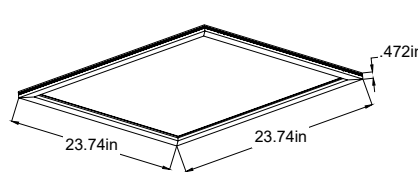

Model 2x4

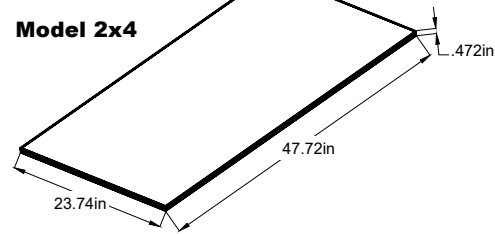

PART NUMBER SPECIFICATION

Part Number Example: P-A4-22-20-35-100277-D

P-A4-	-	-	-	- 100277	-D-ADV
Series	Model	Wattage	CCT	Voltage:	Dimming
	14 - (1 x 4ft.)	30 (30 Watt) 40 (40 Watt)			(Note: SD and D have been upgraded to -ADV. Fixtures meet same specifications as original specified panels.) D (0-10V/PWM Dimming)
	22 - (2 x 2ft.)	20 (20 Watt) 30 (30 Watt) 40 (40 Watt)	30 (3000K) 35 (3500K) 40 (4000K) 50 (5000K)	100277 (100-277VAC)	
	24 - (2 x 4ft.)	30 (30 Watt) 36 (36 Watt) 40 (40 Watt) 50 (50 Watt) 75 (75 Watt)			